

10-27-00  
A  
FISH & RICHARDSON P.C.

225 Franklin Street  
Boston, Massachusetts  
02110-2804

Telephone  
617 542-5070

Facsimile  
617 542-8906

Web Site  
www.fr.com

October 26, 2000

Attorney Docket No.: 00216-519001

**Box Patent Application**

Commissioner for Patents  
Washington, DC 20231

Presented for filing is a new original patent application of:

Applicant: John P. Holden, Brian J. McDonough, Mark F. Nascimento

Title: METHOD AND APPARATUS FOR MAKING A SHAVING RAZOR  
HANDLE

Enclosed are the following papers, including those required to receive a filing date  
under 37 CFR §1.53(b):

	<u>Pages</u>
Specification	5
Claims	2
Abstract	1
Declaration	[To be Filed at a Later Date]
Drawing(s)	3

Enclosures:  
— Postcard.

Basic filing fee	\$710
Total claims in excess of 20 times \$18	\$0
Independent claims in excess of 3 times \$80	\$0
Fee for multiple dependent claims	\$0
Total filing fee:	\$710

CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No. EL228034486US

I hereby certify under 37 CFR §1.10 that this correspondence is being  
deposited with the United States Postal Service as Express Mail Post  
Office to Addressee with sufficient postage on the date indicated below  
and is addressed to the Commissioner for Patents, Washington,  
D.C. 20231.

October 26, 2000

Date of Deposit

Victor J. Mahoney  
Signature

Victor J. Mahoney  
Typed or Printed Name of Person Signing Certificate

Frederick P. Fish  
1855-1930

W.K. Richardson  
1859-1951

BOSTON

DALLAS

DELAWARE

NEW YORK

SAN DIEGO

SILICON VALLEY

TWIN CITIES

WASHINGTON, DC

FISH & RICHARDSON P.C.

Commissioner for Patents

October 26, 2000

Page 2

A check for the filing fee is enclosed. Please apply any other required fees or any credits to deposit account 06-1050, referencing the attorney docket number shown above.


If this application is found to be incomplete, or if a telephone conference would otherwise be helpful, please call the undersigned at (617) 542-5070.

Kindly acknowledge receipt of this application by returning the enclosed postcard.

Please send all correspondence to:

WILLIAM E. BOOTH  
Fish & Richardson P.C.  
225 Franklin Street  
Boston, MA 02110-2804

Respectfully submitted,

A handwritten signature in dark ink, appearing to read "William E. Booth", with a long horizontal line extending from the end of the signature.

William E. Booth  
Reg. No. 28,933

Enclosures

WEB/kzw

20163937.doc

APPLICATION  
FOR  
UNITED STATES LETTERS PATENT

TITLE: METHOD AND APPARATUS FOR MAKING A SHAVING  
RAZOR HANDLE

APPLICANT: JOHN P. HOLDEN, BRIAN J. MCDONOUGH, MARK F.  
NASCIMENTO

CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No. EL228034486US

I hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington, D.C. 20231.

October 26, 2000

Date of Deposit

Victor J. Mahoney  
Signature

Victor J. Mahoney  
Typed or Printed Name of Person Signing Certificate

Method and Apparatus for Making a Shaving Razor Handle

Background of the Invention

The invention relates to the manufacture of plastic shaving razor handles.

5 Shaving razor handles are often made of molded plastic. It is known to first mold a portion of the handle of hard plastic and to then mold elastomeric grip portions at desired locations on the hard plastic portion.

Summary of the Invention

10 The invention features, in general, making a shaving razor handle by molding an inner core of a first plastic in opposed first mold cavities, molding an outer portion of a second plastic around the inner core in opposed second mold cavities, and molding at least one elastomeric grip portion on the outer portion at opposed third mold cavities.

15 Preferred embodiments of the invention may include one or more of the following features. In preferred embodiments, the first and second plastic can have the same composition and can have the same or a different color. E.g., both plastics can be of clear plastic. The inner core can be molded about an engagement member and can be moved from the first mold cavities to the second mold cavities by moving the engagement member. The inner core and additional plastic added at the second mold cavities can be moved from the  
20 second mold cavities to the third mold cavities by moving the engagement member. A plurality of inner cores of the first plastic can be simultaneously molded at first mold cavities. A plurality of outer portions of the second plastic are simultaneously molded at the second mold cavities. A plurality of elastomeric grip portions can be simultaneously molded at third mold cavities. The inner core and additional plastic can be removed from the engagement  
25 member after molding the grip portion, and a handle connection component that has a shape that is similar to the shape of the engagement member can be attached to the handle. The inner core can have a hole passing therethrough, and the additional plastic for the outer portion can be gated through the hole from a first side surface of the inner core to a second side surface of the inner core. A portion of the inner core can be supported at the first side  
30 against a mold surface while the additional plastic flows past the second side surface.

In another aspect, the invention features a shaving razor handle made by the method described.

In another aspect, the invention features apparatus for carrying out the method described.

Embodiments of the invention may include one or more of the following advantages. A thick plastic portion of a shaving razor handle can be efficiently molded in two steps by  
5 reducing the amount and thickness of plastic that is injected and cured at one time. By injecting the plastic in two steps, the formation of the part is much quicker than it would be if the entire amount of plastic were injected in a single step. Quick curing can desirably provide for maintenance of a textured surface finish that might otherwise melt to a smooth surface with dissipation of heat from a thick molded part.

10 Other advantages and features of the invention will be apparent from the following description of a particular embodiment thereof and from the claims.

#### Brief Description of the Drawings

Figure 1 is a perspective view of a molded shaving razor handle.

15 Figure 2 is a perspective view of an elongated part of the Figure 1 handle during manufacture.

Figure 3 is a perspective view of an inner core portion of the Figure 1 handle during manufacture.

20 Figure 4 is a perspective view showing molding apparatus used to make the components shown in Figures 1, 2, and 3.

Figure 5 is a vertical sectional view of a portion of the Figure 4 molding apparatus used to make the Figure 3 inner core.

Figure 6 is a vertical sectional view of a portion of the Figure 4 molding apparatus used to make the Figure 2 part.

25 Figure 7 is a perspective view showing an engagement member of the Figure 4 apparatus used to engage an end of the Figure 3 inner core during manufacture.

#### Description of a Particular Embodiment

30 Referring to Figure 1, shaving razor handle 10 includes elongated part 12 made of clear acrylonitrile butadiene styrene (ABS) available from Denka and grip portion 14 made of elastomeric material available under the Krayton trade designation. Subassembly 16,

used to connect to a shaving razor cartridge (not shown) to handle 10, is secured in a recess in front end 18 of part 12. Figure 2 shows elongated ABS part 12 prior to adding grip portion 14 and securing subassembly 16. Part 12 includes a recessed portion 20 and concave surface 22 on which grip portion 14 is secured. Figure 3 shows inner core 24, which is made of the same ABS as the rest of part 12 and includes the inner portion of elongated part 12. (Alternatively, different color plastics can be used for inner core 24 and the outer portion.) Inner core 24 includes concave surface 22, an end 26 that is thinner than end 18, and a central portion 28 that is thinner than the central portion of part 12 and includes gating through-hole 30 and elongated slotted recess 32.

Manufacture of handle 10 includes a three-step molding process using the apparatus shown in Figures 4-7 and the subsequent attachment of subassembly 16. Referring to Figure 4, molding apparatus 40 includes first mold assembly 42, second mold assembly 44, and triangular mold part 46. First mold assembly 42 includes three sets of mold cavities 48, 50, and 52. Each set includes cavities for molding eight handle parts at the same time. Mold cavities 48 are used to mold inner cores 24. Mold cavities 50 are used to add additional plastic to inner cores 24 in order to result in elongated handle part 12. Mold cavities 52 are used to add elastomeric grip portions 14. Second mold assembly 44 includes three corresponding sets of mold cavities aligned with cavities 48, 50 and 52. Mold part 46 is rotatable and also can be moved out of and into first assembly 42 when second assembly 44 is separated in order to move molded parts out of one set of cavities, rotate them, and move the molded parts into the next set of cavities. Mold part 46 is shown in the separated position in Figure 4. When mold part 46 is retracted, it sits within triangular recess 54 and components secured to it are aligned with and placed in respective cavities.

In the position shown in Figure 4, inner cores 24 that have just been formed in cavities 48 have been moved out of cavities 48. Similarly, elongated parts 12 that have just received additional plastic in mold cavities 50 are shown moved out of cavities 50. The handle parts that include grip portions 14 are shown being removed sideways out of the mold apparatus by product gripper 56 after the parts have been moved out of cavities 52 (partially hidden by parts 12 and gripper 56 in Figure 4). From the position shown in Figure 4, mold part 46 will be rotated counter-clockwise 120 degrees such that inner cores 24 become aligned with mold cavities 50, and elongated parts 12 become aligned with mold cavities 52. Mold part 46 will then be retracted into recess 54 with inner cores 24 in respective cavities

50, and elongated parts 12 in respective cavities 52. Engagement members 57 (also shown in Figure 7), will also be aligned with and located in the ends of cavities 48. First and second mold assemblies 42 and 44 will then be brought together, and plastic will be injected into cavities 48 to form inner cores 24 at the same time that additional plastic is injected into cavities 50 to provide additional plastic around inner cores 24 to result in elongated parts 12, and the elastomeric material is injected into cavities 52 to provide grip portions 14 on elongated parts 12. The first and second assemblies will then be separated, mold part 46 will be moved sideways, and gripper 56 will remove completed handle parts with grip portions 14 prior to rotation of mold part 46 and the subsequent mold operation.

Referring to Figure 5, mold assemblies 42 and 44 are shown beginning to separate from each other after molding of inner core 24 in mold cavity 48. End 26 of inner core 24 has been molded around engagement member 57 on mold part 46 and remains secured to it. Frustoconical protrusion 60 on subassembly 42 provides hole 30. Elongated fin 62 on assembly 44 provides elongated slot 32. Gate 64 is used to inject the plastic into cavity 48.

Referring to Figure 6, mold assemblies 42 and 44 are shown in position at a cavity 50 prior to injection of plastic through gate channel 70. Tubular member 72 at the end of gate channel 70 extends into opening 30 in order to direct plastic to the underside of inner core 24. The plastic proceeds along the lower surfaces of inner core 24 above the upper surface 74 of cavity 50 in the lower assembly 42 and extends to both sides. The plastic underneath inner core 24 causes concave portion 22 to push against the corresponding convex portion 76 of second mold assembly 44. The plastic flowing toward the front of inner core 24 proceeds up to the front end and flows around the sides to the top of inner core 24, eventually filling elongated slot 32. The additional plastic injected into cavity 50 tends to remelt the surface of inner core 24 thereby providing an integral plastic part 12 of uniform, high clarity. The surfaces of the mold defining cavities 52 are textured to impart textured surfaces to part 12.

Apparatus 40 provides for efficiently molding the thick plastic portion of elongated part 12 by reducing the amount and thickness of plastic that is injected and cured at one time. Thus, after formation of inner core 24, the relatively small volume of inner core 24 quickly cures and is moved to a cavity 50. In cavity 50, the additional plastic around inner core is sufficiently thin that it can also quickly cure. By doing the injection of plastic in two steps, the formation of the part is much quicker than it would be if the entire amount of plastic were injected in a single step. The quick curing desirably provides for maintenance of a textured

surface finish on part 12 that might otherwise melt to a smooth surface with dissipation of heat from a thick molded part.

Other embodiments of the invention are within the scope of the appended claims.

What is claimed is:



1           1. A method of making a shaving razor handle comprising molding an inner core  
2 of a first plastic at opposed first mold cavities, molding an outer portion of a second  
3 plastic around said inner core at opposed second mold cavities, and  
4           molding at least one elastomeric grip portion on said outer portion at opposed  
5 third mold cavities.

1           2. The method of claim 1 wherein said first and second plastic have the same  
2 composition

1           3. The method of claim 1 wherein said first and second plastic have the same  
2 composition except the compositions have different colors.

1           4. The method of claim 1 wherein said molding an inner core includes molding a  
2 portion of said inner core about an engagement member, and further comprising moving  
3 said inner core from said first mold cavities to said second mold cavities prior to said  
4 molding an outer portion.

1           5. The method of claim 4 further comprising moving said inner core and said  
2 outer portion from said second mold cavities to said third mold cavities prior to said  
3 molding said at least one grip portion.

1           6. The method of claim 1 wherein a plurality of inner cores of a first plastic are  
2 simultaneously molded at said first mold cavities.

1           7. The method of claim 6 wherein a plurality of outer portions of said second  
2 plastic are simultaneously molded at said second mold cavities.

1           8. The method of claim 7 wherein a plurality of elastomeric grip portions are  
2 simultaneously molded at said third mold cavities.

1           9. The method of claim 4 further comprising removing said inner core from said  
2 engagement member after said molding said grip portion, and thereafter attaching a  
3 handle connection component that has a shape that is similar to the shape of said  
4 engagement member.

1           10. The method of claim 1 wherein said molding an inner core includes molding  
2 an inner core having a hole passing therethrough, and wherein said molding an outer  
3 portion includes gating plastic for said outer portion through said hole from a first side  
4 surface of said inner core to a second side surface of said inner core.

1           11. The method of claim 10 wherein said molding an outer portion includes  
2 supporting said first side against a mold surface while said plastic flows past said second  
3 side surface.

1           12. A shaving razor handle made by the method of claim 1.





1           13. Apparatus for making a shaving razor handle comprising mold assemblies  
2 having opposed first mold cavities for molding an inner core of a first plastic, opposed  
3 second mold cavities for molding an outer portion of a second plastic around said inner  
4 core, and opposed third mold cavities for molding at least one elastomeric grip portion on  
5 said outer portion, and a product mover for moving said inner core from said first mold  
6 cavities to said second mold cavities and for moving said inner core and said outer  
7 portion from said second mold cavities to said third mold.

1           14. The apparatus of claim 13 wherein said product mover includes engagement  
2 members around which said inner cores are molded in said first cavities.

Abstract of the Disclosure

Manufacture of a shaving razor handle by molding an inner core of a first plastic in opposed first mold cavities, molding an outer portion of a second plastic around the inner core in opposed second mold cavities, and molding at least one elastomeric grip portion on the outer portion at opposed third mold cavities.

20143696.doc

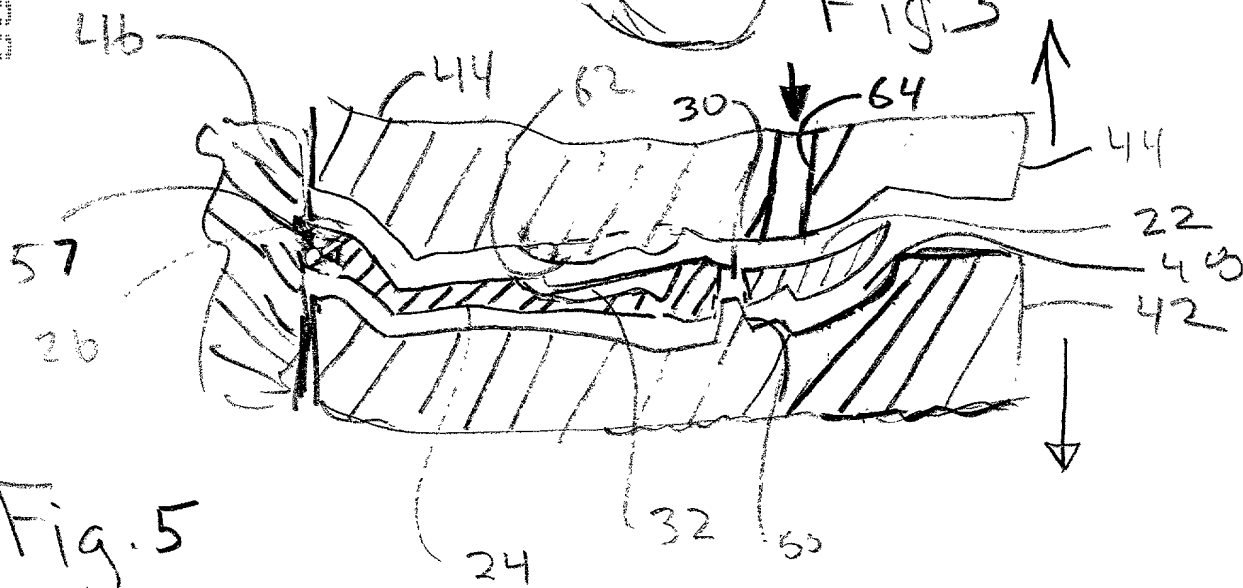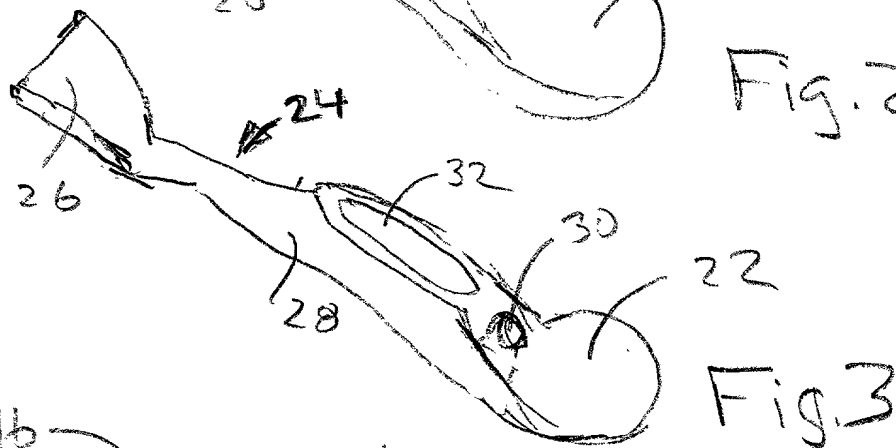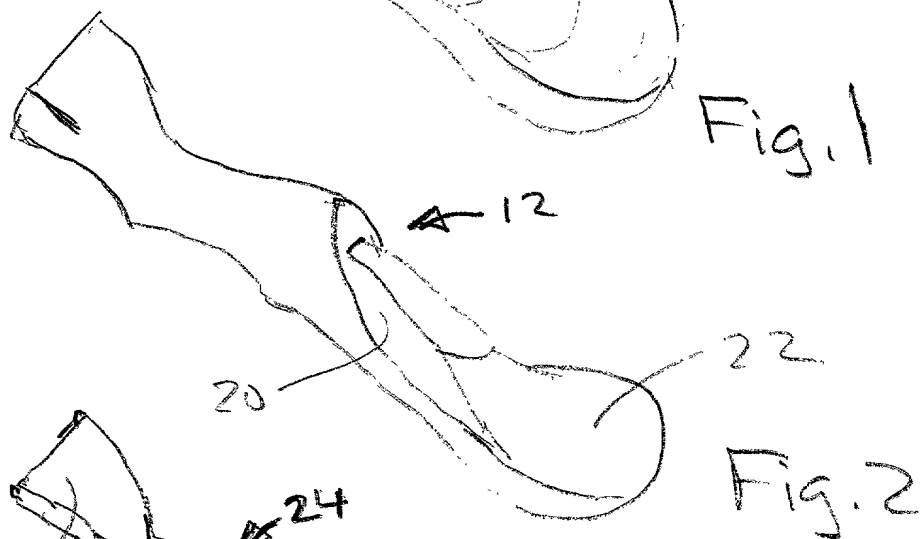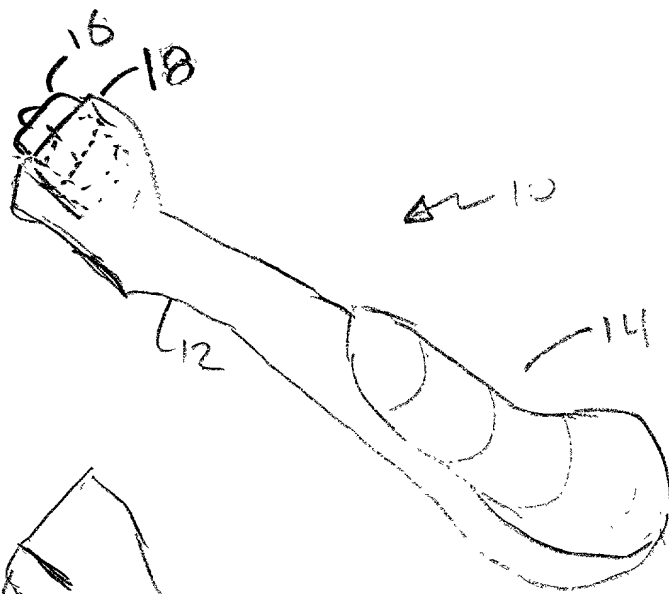



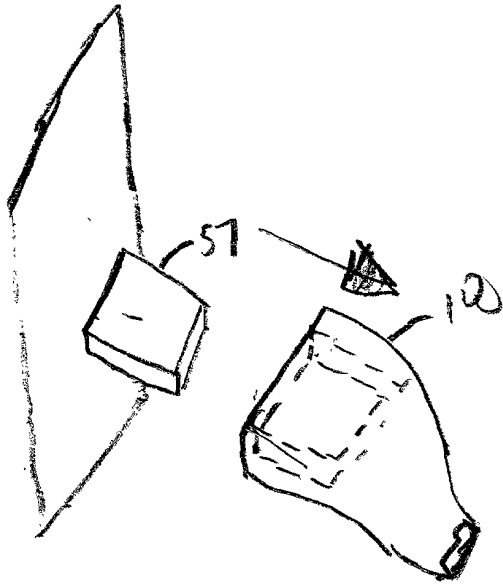


Fig. 7

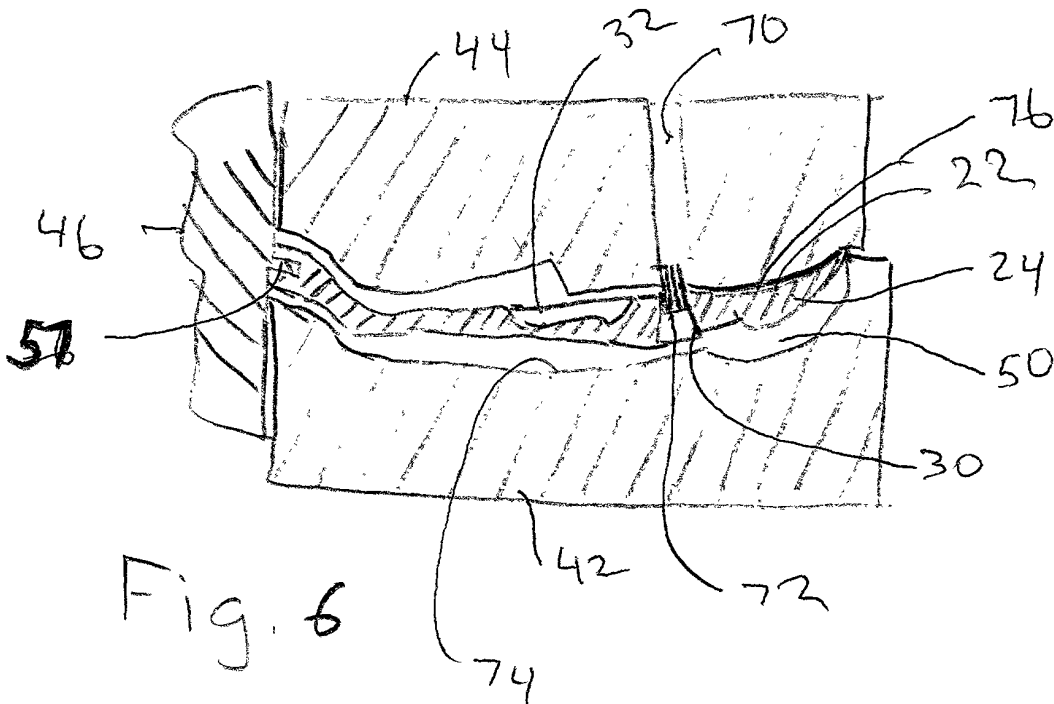


Fig. 6

## COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled METHOD AND APPARATUS FOR MAKING A SHAVING RAZOR HANDLE, the specification of which:

☐ is attached hereto.

☒ was filed on October 26, 2000 as Application Serial No.          and was amended on         .

☐ was described and claimed in PCT International Application No.                          filed on                          and as amended under PCT Article 19 on                         .

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information I know to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Robert C. Nabinger, Reg. No. 33,431

William E. Booth, Reg. No. 28,933

Address all telephone calls to WILLIAM E. BOOTH at telephone number (617) 542-5070.

Address all correspondence to WILLIAM E. BOOTH at:

FISH & RICHARDSON P.C.  
225 Franklin Street  
Boston, MA 02110-2804

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.

Full Name of Inventor: John Philip Holden

Inventor's Signature: \_\_\_\_\_ Date: \_\_\_\_\_  
Residence Address: 34 Warren Road, Townsend, MA 03842  
Citizenship: USA  
Post Office Address: \_\_\_\_\_

**Combined Declaration and Power of Attorney**

Page 2 of 2 Pages

Full Name of Inventor: Brian James McDonough

Inventor's Signature: \_\_\_\_\_ Date: \_\_\_\_\_  
Residence Address: 22 Sheppard Avenue, Braintree, MA 02184  
Citizenship: USA  
Post Office Address:

Full Name of Inventor: Mark F. Nascimento

Inventor's Signature: \_\_\_\_\_ Date: \_\_\_\_\_  
Residence Address: 407 Ocean Boulevard, Unit B2, Hampton, NH 03842  
Citizenship: USA  
Post Office Address:

20163947.doc

20163947.doc